

MENUMASTER[®] Commercial

Project #: _____

Item #: _____



Model CHDC5142 shown

Heavy Volume

This category of microwave is ideal for...

Applications:

- Quick service restaurants
- Fast casual dining
- Bars & grills

Through put potential:

- Pre cooked frozen bacon, 700+ slices per hour
- 6 oz. portion of refrigerated Macaroni & Cheese, 40+ portions per hour
- 1 lb. batch of fresh shrimp, 30+ batches per hour
- 1 baked potato, 20+ per hour

Defrost:

- Defrosts most frozen food products

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

Heavy Volume

Menumaster Commercial Microwave Model CHDC5142

Power Output

- 1400 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.
- Unique method of energy distribution provides superior even heating throughout the cavity.
- Interlock switch assembly is engineered for maximum durability and long life.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming. Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- See-through tempered glass outer window and lighted interior for monitoring without opening the door.
- Ample 17 liter (0.6 cubic ft.) capacity accommodates a standard half-sized pan.
- Stackable to save valuable counter space.
- Interior ceramic shelf is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained.

Easy to Maintain


- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protects oven components.
- CQC Listed.


AIA File #:

Specification #:



MenuMaster Commercial Microwave Model CHDC5142 | Heavy Volume

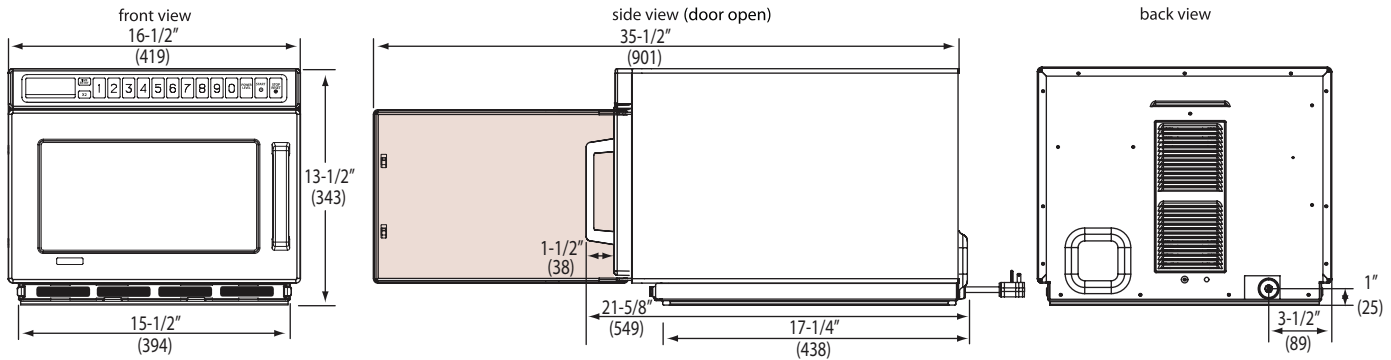

Specifications	
Model	CHDC5142 UPC Code 719881176291
Configuration	Countertop
Control System	Touch
Programmable Control Pads	10
Settings Programmable	100
Max. Cooking Time	60:00
Power Levels	11
Defrost	Yes, power level 2
Time Entry Option	Yes
Microwave Distribution	Double rotating antenna, top and bottom
Magnetrons	2
Display	LED
Stackable	Yes
Stage Cooking	Yes, 4
Interior Light	Yes
Door Opening	Grab and pull handle
Signal	Adjustable, end of cycle
Temp. Display	Yes
Air Filter	Yes, removable, with clean filter reminder
Multiple Portion Setting	Yes, up to 2 portions
Exterior Dimensions	H 343 (13 1/2") W 419 (16 1/2") D** 549 (21 5/8")
Cavity Dimensions	H 171 (6 3/4") W 330 (13") D 305 (12")
Door Depth	940 mm (37"), 90°+ door open
Usable Cavity Space	17 liters (.6 cubic ft.)
Exterior Finish	Stainless steel
Interior Finish	Stainless steel with sealed-in ceramic shelf
Power Consumption	2300 W, 10.0 A
Power Output*	1400 W* Microwave
Power Source	230V, 50 Hz, 16 A single phase
Plug Configuration / Cord	CHINA 1.7m (5' 6") 
Frequency	2450 MHz
Product Weight	30 kg (67 lbs.)
Ship weight (approx.)	33 kg (73 lbs.)
Shipping Carton Size	L 625 (24 5/8") W 556 (21 7/8") D 473 (18 5/8")

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to eight portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit and include a temperature reading. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 1400 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. Heavy duty door shall have a tempered glass outer window and a grab and pull handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 17 liters (.6 cubic ft.) cavity shall accommodate a standard 152 mm (6") deep half-sized pan. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have a removable, cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. CQC listed.



Warranty

Warranty Certificate for this product can be found by locating it on the ACP, Inc. website at:

www.acpsolutions.com/warranty



Measurements are in millimeters

* IEC 60705 Tested

** Includes handle

