


INSTRUCTION SHEET

16200044


Description: Solenoid Assy Kit # 14090033 (Left) or 14090034 (Right)

Contents: 1 – Solenoid Assembly
1 – 16200044 Instruction Sheet


1. Unplug or disconnect power to the oven.
2. Open door and remove side panel of solenoid being replaced.
3. Remove touch panel assembly by removing screws holding touch panel assembly to oven frame and tilt bottom out to separate touch panel assembly from frame.

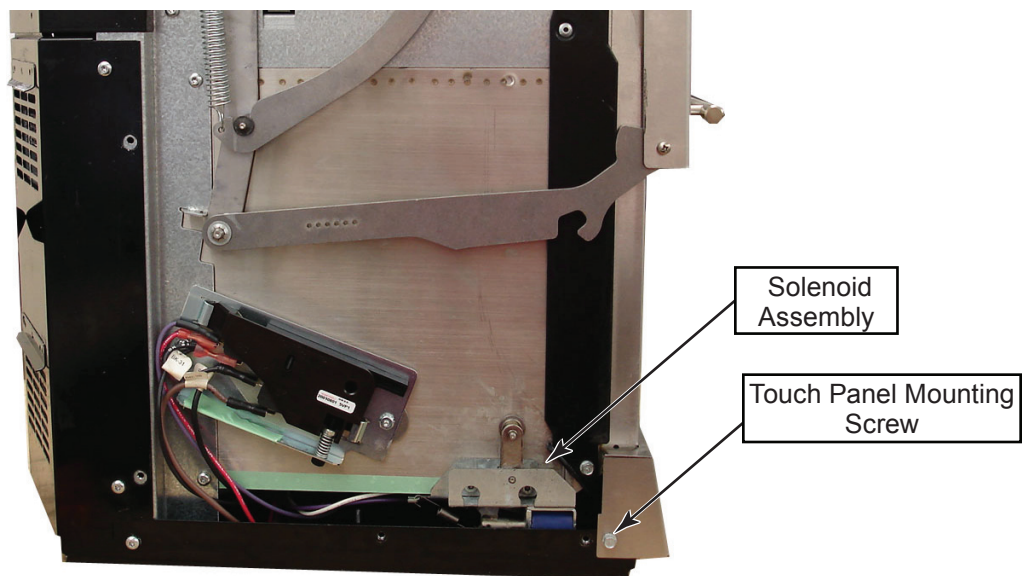


4. Remove lower hex head screw from glide strip.

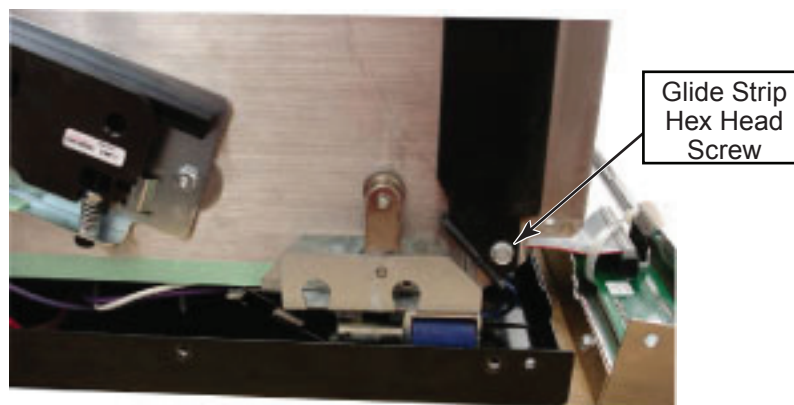


5. Remove two T-15 Torx or hex screws holding solenoid assembly to cavity.

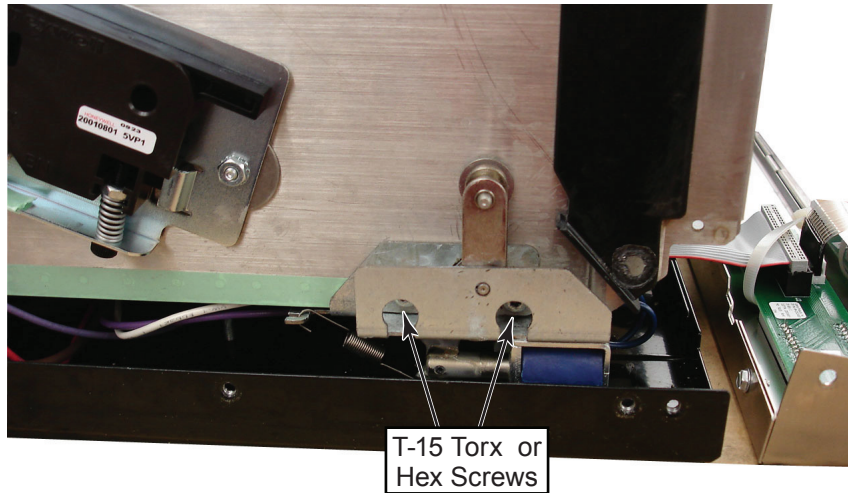

6. Pull out bottom of glide strip and slide solenoid assembly forward up and out from under cavity.

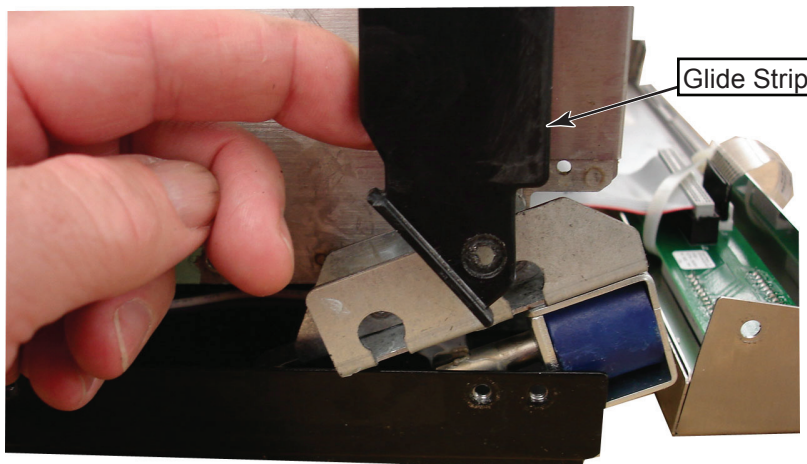

7. Disconnect connector and remove solenoid assembly.

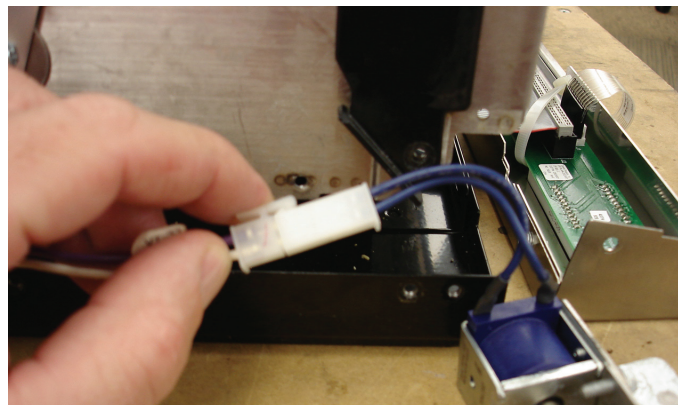

8. Reverse procedure to install new solenoid assembly.

ACP, Inc.
225 – 49TH Avenue Drive SW
Cedar Rapids, IA 52404

REV. 1
DATE: 3-15-10
PART #: 1620044
Page 2 OF 2