

INSTRUCTION SHEET

16200063

FOR ALL AXP / MXP MODELS:


- When installing Fan Motor make sure airflow is in the correct direction. Look at the directional arrows on the side of fan body to determine airflow direction.

Note: Discard studs and nuts for AXP / MXP model installations.



Type A

Type B

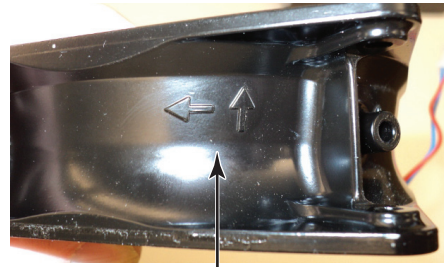

Directional Arrows

FOR MODELS: OC5241BK, AOC5241, MOC5241

Description: Fan Motor Kit # 59002132

Contents:

- 1 – 59002132 Fan Motor
- 2 – M0293510 Stud #8 SC
- 2 – M0282007 Nut
- 1 – 16200063 Instruction Sheet

Procedure:

1. Disconnect power from unit.
2. Remove top panel and lower back panel from unit.
3. Using .64mm drill bit drill out two rivets holding line filter to the upper rear shroud of oven (Figure 1).

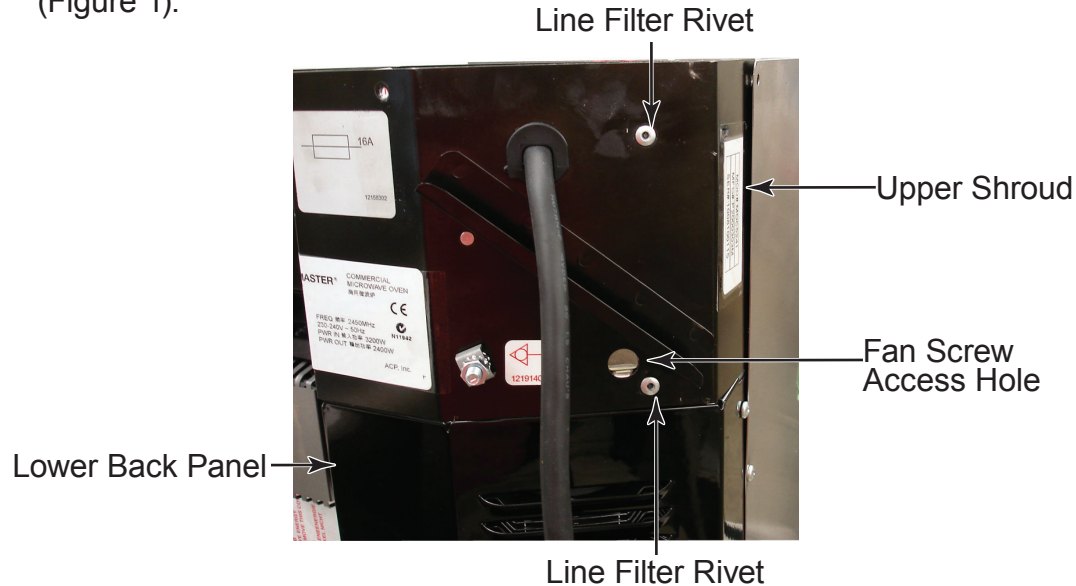


Figure 1

ACP, Inc.
225 – 49TH Avenue Drive SW
Cedar Rapids, IA 52404

REV. 1
DATE: 12-3-10
PART #: 16200063
Page 1 OF 2

4. Move line filter out of way of fan motor mounting screw access hole in upper rear shroud and remove lower right screw of fan motor with screw driver through access hole (Figure 2).



Figure 2

5. Remove left lower screw from fan motor by accessing it from under the upper shroud panel at a slight angle.
 6. Remove right and left top screws from fan motor.
 7. Disconnect fan motor wire connector from harness.
 8. Remove fan motor.
- Note:** Remove fan guards from fan motor and install on replacement motor making sure not to reverse fan guard on replacement motor.
9. Reverse procedure to install replacement motor making sure that the airflow direction arrow points to the rear of chassis (Figure 3).

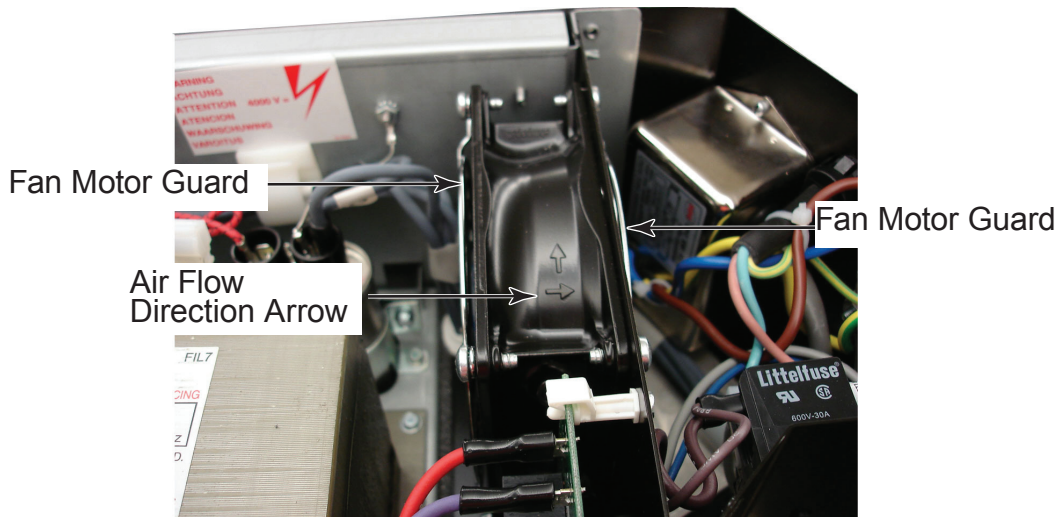


Figure 3

10. Reinstall line filter replacing rivets with studs and nuts included in kit.