

INSTRUCTION SHEET

16200042

Description: HV / LV Board Kit # 14090032
Contents: 1 – HV / LV Board
 1 – 16200042 Instruction Sheet

Some ovens may require reprogramming. Refer to chart below for model specific instructions.

CRC18T2OG2	P1333104M	Requires reprogramming- see instructions A & B
CRC21T2RL2	P1333108M	Requires reprogramming- see instructions A & B
HDC182	P1333102M	Direct replacement
HDC18SD2	P1333103M	Direct replacement
HDC212	P1333105M	Direct replacement
HDC21RB2	P1333106M	Requires reprogramming- see instructions A & B
HDC21RT2	P1333107M	Direct replacement

A. Instructions for reprogramming COOK TIMES on the models shown below:

1. Open the oven door.
2. Press and hold pad 1 for five seconds “PROGRAM” appears.
3. Press desired pad.
4. Enter desired cooking time.
5. If power level other than 100% is required, press POWER LEVEL pad, then press a numbered pad to enter desired power level.
6. Press START pad to save the program.
7. Press STOP/RESET pad or close door to exit programming mode.

CRC18T2OG2

Pad	Time	Power
1	0:30	100%
2	0:45	100%
3	1:00	100%
4	1:15	100%
5	1:30	100%
6	1:45	100%
7	2:00	100%
8	2:15	100%
9	2:30	100%
0	2:45	100%

CRC21T2RL2

Pad	Time	Power
1	0:10	100%
2	0:30	100%
3	0:35	100%
4	0:40	100%
5	0:45	100%
6	0:55	100%
7	1:15	100%
8	1:30	100%
9	1:45	100%
0	2:10	100%


HDC21RB2

Pad	Time	Power
1	0:07	100%
2	0:12	100%
3	0:20	100%
4	0:25	100%
5	0:30	100%
6	0:35	100%
7	0:40	100%
8	0:50	100%
9	1:00	100%
0	0	100%

B. Instructions for disabling the CLEAN FILTER feature

Description of Clean Filter Feature

- The CLEAN FILTER icon will display for 24 hours every 7 days as a reminder to customer

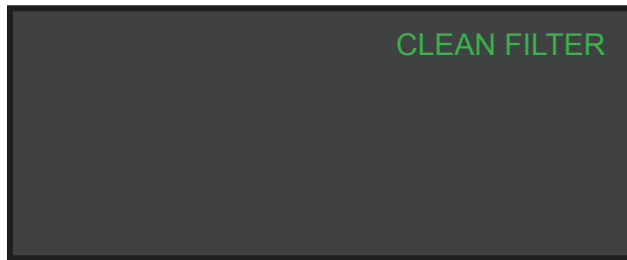

- Cleaning the filter will not shut off this message
- Oven will still function normally during this 24 hour period
- Message will not appear while oven is operating

1. Open the oven door.
2. Press and Hold pad 2 for five seconds "OPTIONS" appears.
3. Press pad "0" to enter CLEAN FILTER option mode.
4. Press pad "0" again until "OP:00" appears in the display.
5. Press START pad to save changes.
6. Oven is now set to **not** display CLEAN FILTER message.